


NetWaySP4BTPL

4-port Hardened 4PPoE (802.3bt) Switch with Integral Power on a Backplane



Altronix NetWaySP4BTPL supports up to 90W per port (240W total power) for deploying the latest high-powered IP devices in remote locations. It is equipped with two (2) 1Gb SFP ports to transmit data at long distances and four (4) 802.3bt compliant Ethernet ports. NetWaySP4BTPL accommodates single/multi-mode fiber cable to deliver data from NetWay Spectrum head-end media converters/injectors. Embedded LINQ Technology allows to monitor, control, and report power and diagnostics from anywhere.

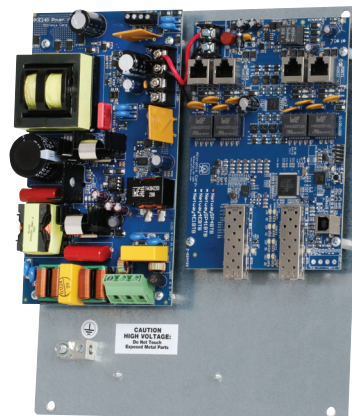

NetWaySP4BTPL

Key Features


- Four (4) 10/100/1000 Mbps Ethernet ports rated at 90W each (limited to 240W total power)
- IEEE 802.3af, 802.3at, 802.3bt compliant
- Two (2) Gigabit SFP ports
- VLAN (Virtual Local Area Networks) subnetwork allows for the grouping together of devices for improved network traffic and higher security
- Built-in charger for LiFePO₄ (Lithium Iron Phosphate) or sealed lead acid or gel type batteries
- CE European Conformity
- Switch and power supply are factory mounted on a backplane
- LINQ Technology:
 - Remote network management allows for camera/device reset and diagnostic monitoring
 - Provides local and/or remote access to critical information via LAN/WAN
 - Email and Windows Dashboard Alert notifications report real-time events
 - Event log tracks history

Similar products

| | |
|-----------------------|--|
| NetWaySP4BTWPX | Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries |
| NetWaySP4BTWP | Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure |
| NetWaySP4BTWPN | Outdoor 4-port Hardened 4PPoE Switch in NEMA 4/4X, IP66-11 enclosure |
| NetWaySP4BTX | 4-port Hardened 4PPoE Switch with Integral Power in NEMA 1 Rated indoor enclosure |
| NetWaySP4BTB | 4-port Hardened 4PPoE Switch (board only) |

Lifetime Warranty

Typical Application

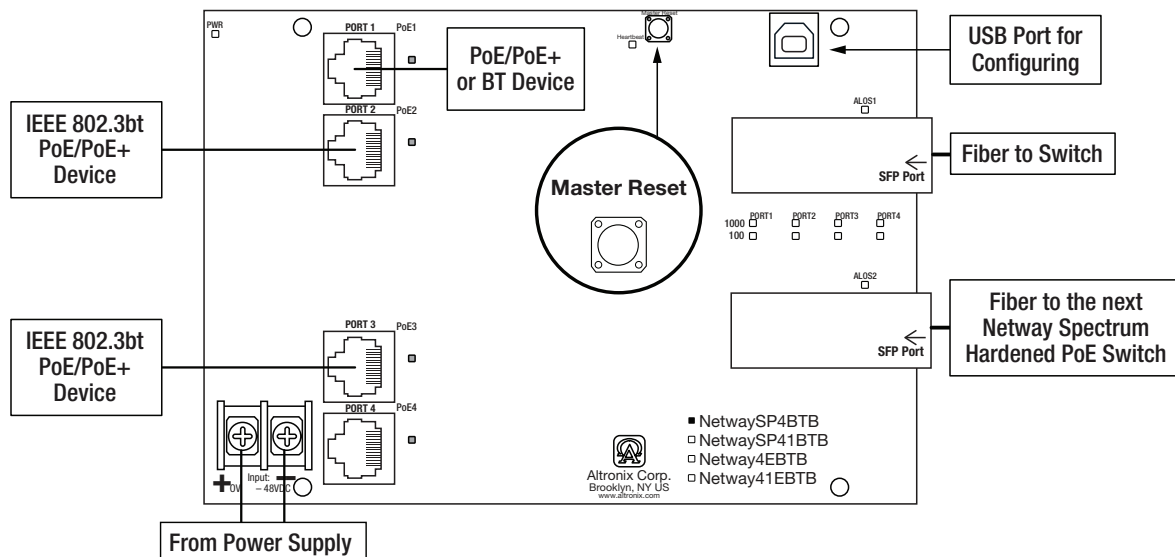

Accessories (order separately)



SFP Modules - Hot Pluggable Transceivers

| | |
|--------|--|
| P1MM | Multi-Mode SFP Module for distances up to 550m |
| P1SM10 | Single-Mode SFP Module for distances up to 10km |
| P1AB2K | Single Strand SFP Module for distances up to 2km |
| P1GCE | Copper SFP Module for distances up to 100m |



NetWaySP1A

Ethernet over Fiber Media Converter/Repeater for Applications Requiring an Additional SFP (Fiber) Port
NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).

Lifetime Warranty



NetWaySP4BTPL

4-port Hardened 4PPoE (802.3bt) Switch with Integral Power on a Backplane



Specifications

Input

Voltage 115VAC, 60Hz, 1.8A or 230VAC, 50/60Hz, 1A
Input Fuse 5A/250V

Power Output

Maximum Power Four (4) PoE ports rated at 90W each,
240W total power
IEEE 802.3af (15W), IEEE 802.3at (30W),
IEE 802.3bt (90W) compliant
Integral surge protection

SFP Ports:

Two (2) Gigabit SFP ports

Ethernet Ports:

Four (4) 10/100/1000 Mbps ports.
Connectivity: RJ45, auto-crossover
Wire type: 4-pair CAT5e or higher
structured cable.
Speed: 10/100/1000 Mbps,
half/full duplex, auto negotiation.

Battery Charging

Type 24VDC charging circuit charges
LiFePO₄ (Lithium Iron Phosphate) or
sealed lead acid or gel type batteries
(require separate ventilated enclosure)

Failover Upon AC loss, instantaneous
Batteries are sold separately

Indicators (LED)

Individual PoE On LEDs for each port
Individual IP Link status, 10/100/1000 Base-T/active LEDs for
each port
ALOS LED indicates fiber connection for SFP port
Heartbeat LED indicates proper operation of the unit

VLAN:

Multiple management VLAN assignment
802.1Q Tagged VLAN
Up to 10 VLAN groups. ID Range 2-4095

LINQ Technology:

Remote network management allows for camera/device reset
and diagnostic monitoring
Provides local and/or remote access to critical information via
LAN/WAN
Email and Windows Dashboard Alert notifications report
real-time events
Event log tracks history

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D approx.):

Backplane: 10.75" x 8.875" x 2.375"
(273.1mm x 225.4mm x 60.3mm)
Shipping: 12" x 10" x 8"
(304.8mm x 254mm x 203.2mm)

Weight (approx.)

Product: 2.6 lb. (1.18 kg)
Shipping: 4.0 lb. (1.81 kg)

Temperature

Operating:

240W: - 40°C to 55°C (- 40°F to 131°F)
180W: - 40°C to 65°C (- 40°F to 149°F)
150W: - 40°C to 75°C (- 40°F to 167°F)
Storage: - 40°C to 85°C (- 40°F to 185°F)

Relative Humidity: 85% +/- 5%

BTU/Hr. (approx.): 122 BTU/Hr.

Operating Altitude: - 304.8 to 2,000m

Lifetime Warranty


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Dimensions and Drawing

Backplane Dimensions (H x W x D approximate)

10.75" x 8.875" x 2.375" (273.1mm x 225.4mm x 60.3mm)

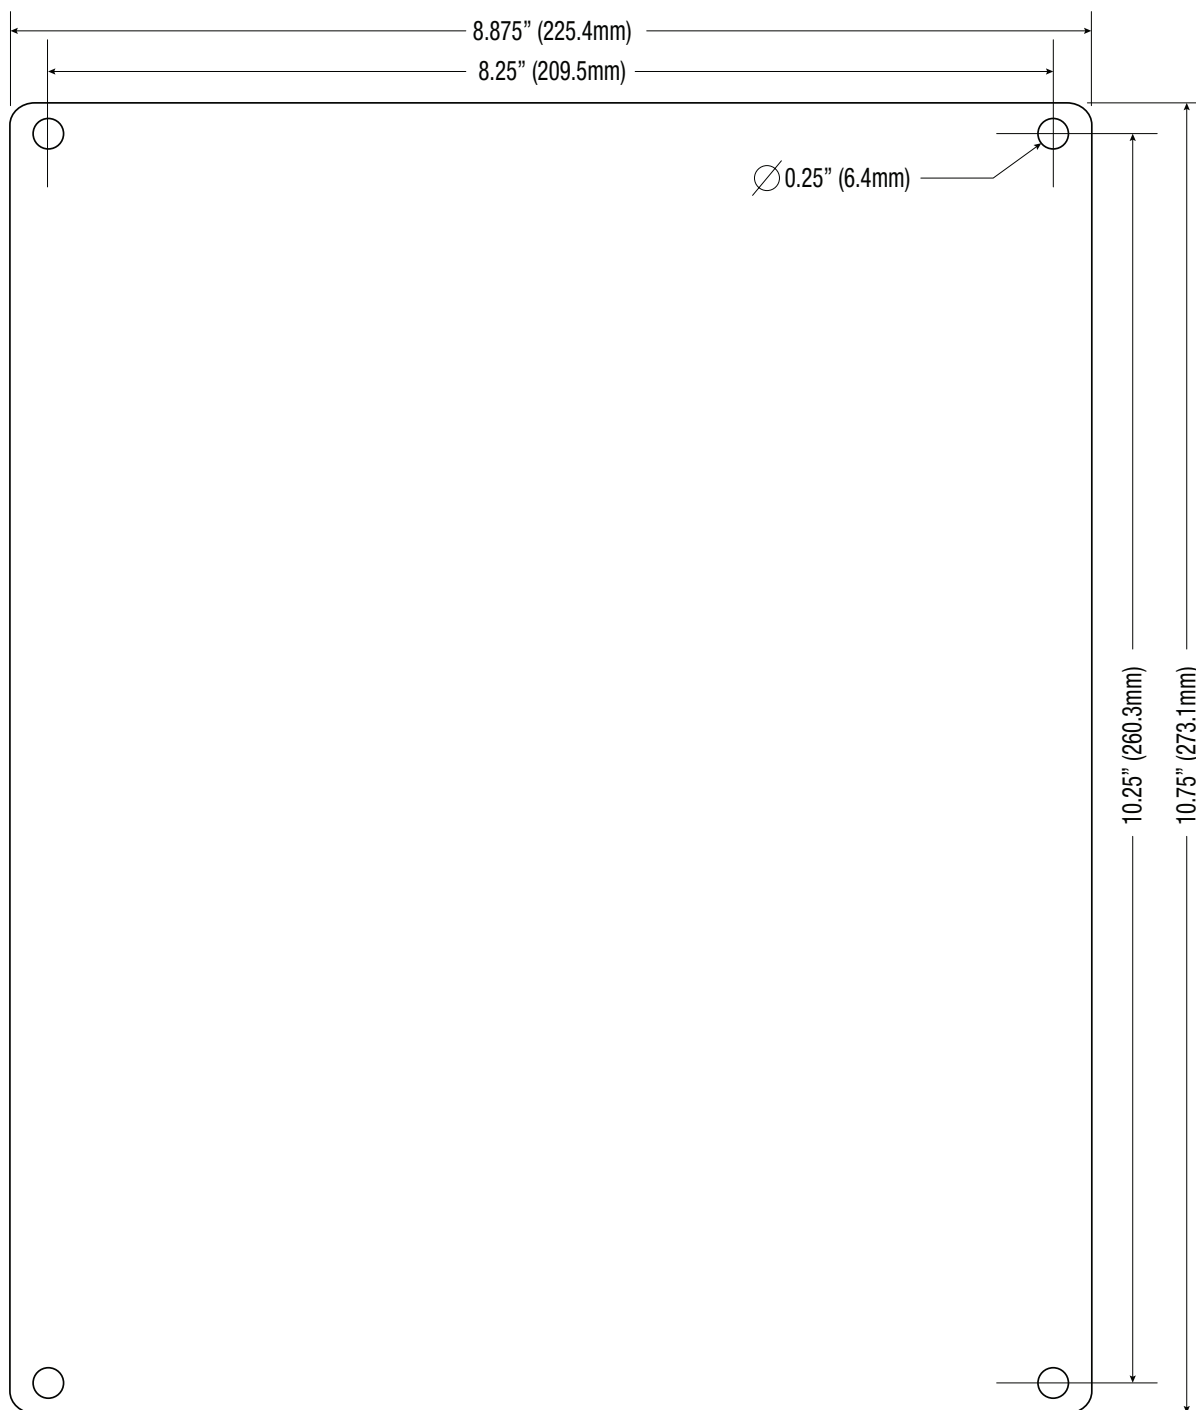**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com